

FLUORITZ™-TR



“FLUORITZ-TR” is the most recent development in pure and radical resistant high performance seals. “FLUORITZ-TR” has improved anti-cracking and low adhesion characteristics compared with existing perfluoro-elastomers. Because no metallic fillers are added, “FLUORITZ-TR” has a higher purity level than

other materials. In order to combat poor radical resistance, impurities in the chamber and stickiness, “FLUORITZ-TR” is created for the next generation of harsh environments.

TYPICAL PROPERTIES

Color	Hardness (Shore A)	Tensile strength (MPa)	Elongation (%)	Modulus 100% elongation (MPa)	Service temperature range	Compression Set (%)
Dark Brown	72	11.1	160	3.1	~260°C	7%

Compression Set: After squeezing 25% at 200°C x 72 hours


Above values are actual measurements, not standards.



NIPPON VALQUA INDUSTRIES., Ltd.


Radical Exposure Test ~Anti-cracking property~

Test conditions
 Equipment: Parallel flat plasma tool
 Plasma power: RF300W Gas: O2+CF4 (196 : 4)
 Irradiation condition: Down flow attack
 Test piece: AS568A-214 with 28% stretching condition

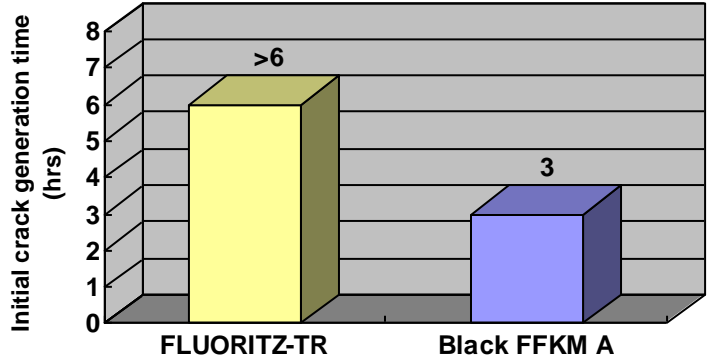


Radical Exposure Test ~Weight loss~

Test conditions
 Equipment: Parallel flat plasma tool
 Plasma power: RF300W Gas: O2+CF4 (196 : 4)
 Irradiation condition: 6hours down flow attack
 Test piece: AS568A-214 with 0% stretching condition

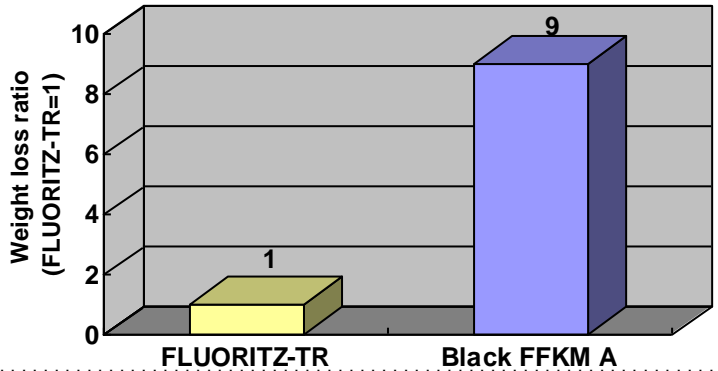


Sticking Strength

Test conditions
 Temperature: 80°C
 Heating time: 72h
 Test piece: AS568-270 O-ring
 Counter face: Anodized aluminum

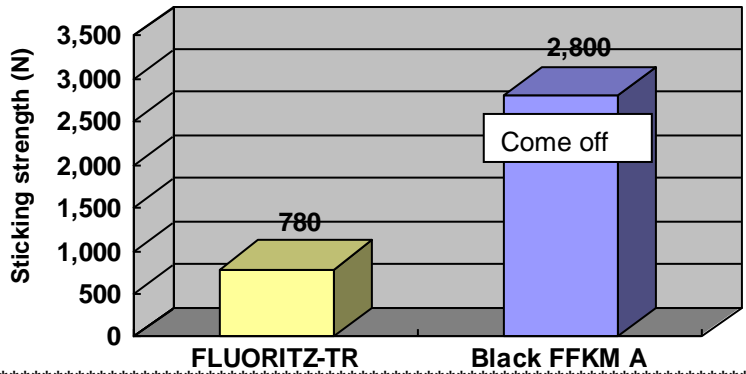

Inorganic components content

Test conditions
 Measuring method: ICP/ MS analysis
 Inorganic elements (Total of 62 elements)

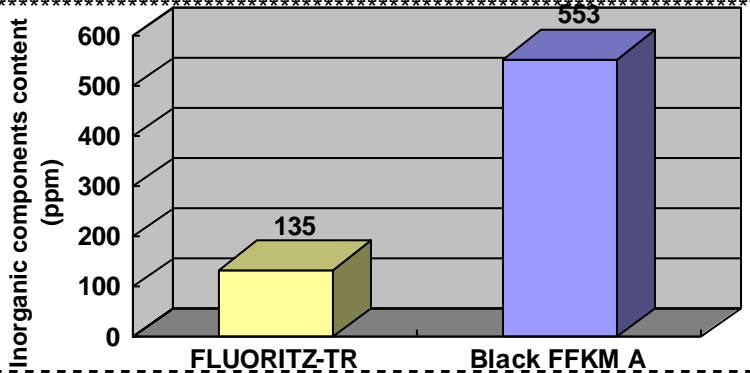

All trademarks and registered trademarks noted in this file are the exclusive property of Nippon Valqua Industries, Ltd. unless otherwise specified. This document is made for use in Japan. Although these data are created based on the data and the information of June 2013, Nippon Valqua Industries Ltd. may change these data without notice for the reason of improvement in functional of a product, standard revision and others. Please note the following point in use of these data. (1) An operating temperature, pressure range, durability, etc. indicated in this catalogue do not assume each operation conditions but show the application possibility based on our company data, an actual result, etc. Therefore, please use these data after checking the aptitude in actual use environment. (2) The data contained within this catalogue can only be taken as a guide. (3) A standard, a value, etc. are the purposes made legible, and may be performing an extract, recombination, arrangement, conversion, etc. of a value. (4) Although the maximum attention was paid in this data creation, Nippon Valqua Industries Ltd. will not accept responsibility for any loss incurred through error or omission. Please contact your distributor or VALQUA group if you have any questions. (5) This document contains confidential information. So please do not disclose this confidential information to the third party without our company's permission.
 © 2013 Nippon Valqua Industries, Ltd. All rights reserved.
 Manufactured in Japan.



NIPPON VALQUA INDUSTRIES., Ltd.
<http://www.valqua.co.jp>

Contact:
 NIPPON VALQUA INDUSTRIES., Ltd.
 ThinkPark Tower, 1-1, Osaki 2-chome,
 Shinagawa-ku, Tokyo, 141-6024, Japan
 Tel: +81-3-5434-7380, Fax: +81-3-5436-0566